




Marine Grade LCD Bridge Monitor  
Sunlight Viewable LED Backlighting

# MPC-BR15

## 15" Marine Grade LCD Monitor

## Sunlight Readable LED Backlight

The MPC-BR15 is a marine grade flat panel Active Matrix LCD Monitor designed for extremely rugged use where the front must be fully sealed from water, oil, dirt and other contaminants. The MPC-BR15 has a 15" diagonal display, designed for use anywhere onboard in a console or bulkhead, or free-standing. The front located manual dimming control adjusts the LED display brightness from max to super-dim for optimal operator viewing clarity and comfort in any lighting condition. The standard brightness of the ~1,000 nit LED backlight is suitable for all lighting conditions, but dims to ~10 nits for night operations. The MPC-BR15 connects through the VGA, DVI-D, HDMI or composite video input from a high performance computer, radar, or other video sources. A composite video input are also available from a camera or other NTSC/PAL signal. The native resolution is 1024x768 for a 4:3 image, but the MPC-BR15 can auto-scale any lesser resolution to fit full screen. An optional P-CAP touch screen will operate with the latest software for multi-touch functionality. The all aluminum case a virtually eliminates any chance of corrosion for a very long service life. The standard anti-reflective protective glass provides easy viewing in all lighting conditions. The attractive, compact case allows mounting in very tight spaces. When properly mounted and sealed in place, the flush front is rated IP65, but can also mount with optional "U" bracket or on any VESA arm. Common applications include primary display or repeater from a computer, chart plotter, blackbox radar or sounder or weather computer. Input power is 10-38 VDC, but can accept 115/230 VAC with the addition of an optional external power adapter.

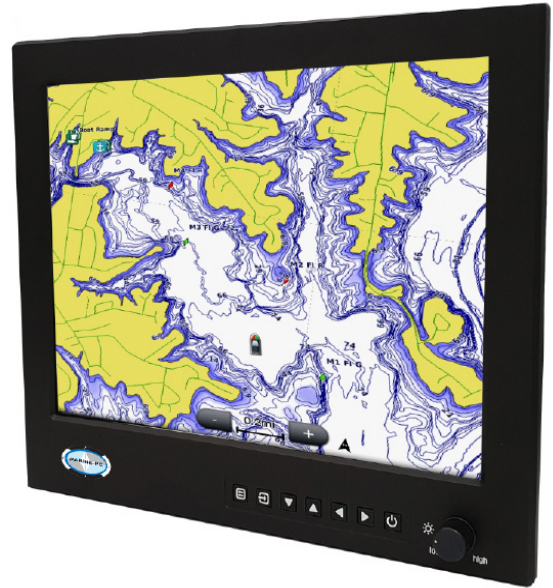

### Standard Features

- Milled Aluminum Front Bezel Rated IP65.
- Space Saving: 364mm. x 314mm. x 57mm.
- 15" Color TFT AMLCD, 16.2 Million Colors.
- XGA(1024x768) Native Resolution.
- ~1,000 nit Brightness, 1000:1 Contrast Ratio.
- Manual Linear Dimming knob from Max to ~10 nit.
- Standard RGB Video (VGA) from any Computer.
- DVI-D and HDMI from Radar or other Computer.
- Composite Video Input, NTSC or PAL.
- Low power (30w. max) and wide operating temp.
- Flush Bezel for Console Mounting, or free-standing.
- Powered from 10-38 VDC or optional 120/240 VAC.
- A/R Glass or Optional P-CAP Touchscreen.

[WWW.MARINEPC.COM](http://WWW.MARINEPC.COM)



Marine Grade LCD Bridge Monitor  
Sunlight Viewable LED Backlighting

# MPC-BR15

## Specifications

Display	15" Diagonal Active Matrix TFT LCD: XGA 1024x768 pixels, 1000:1 Contrast Ratio, 16.2 Million Colors Active Viewing Area: 306mm. x 232mm., Response Time: 5msec		
Brightness	~1,000 nits. Dimmable 1000:1 for Night time Operation, LED Backlight, Dimmable to ~10 nit		
Video Input	RGB Video from Any Standard Computer, DVI-D Input, HDMI Input, 1 - Composite Video Input (NTSC or PAL)		
Touchscreen (Optional)	P-CAP Multi-Touch, USB Connection to PC.		
Cable	Power - Sealed Thread-On, 6 ft. (2m.) Flying Leads 1 -Video - 6 Ft. (2m.)Shielded Cable, Standard Mini-DIN DB-15 M-M		
Housing	All Aluminum, Black Anodized Front Finish, IP65 Splashproof Miled Aluminum Front, IP44 Rear		
Dimensions	364mm. x 314mm. x 57mm. (14.33" x 12.36" x 2.24")		
Mounting	Flush Mount Bezel for Mounting in Panel or Frame. Desktop U-Frame or Adjustable Arm Mounting Optional.		
Weight (without Mount)	5 kg / 11 lbs.		
Power (Max)	60 Watts 12 VDC Option: 115/230 VAC External Power Adapter		
Environmental	<b>Operating</b>	<b>Non-Operating</b>	
	Temperature (Air Ambient)	-10°C to 50°C (14°F to 122°F)	-20°C to 70°C (-4°F to 158°F)
	Relative Humidity	5% to 95%, non-condensing	
	Shock	50 G (half-sine for 30msec.)	
Vibration	1.0 G (@ 5 - 500 Hz sine sweep, 3 - axis)		
MTBF	30,000 Hrs.		
Standards	CE, FCC Class A, Part 15, Designed to Meet IEC60945		

